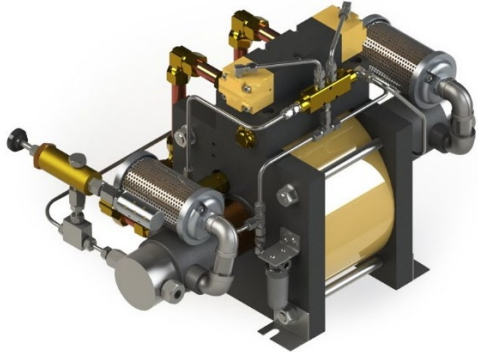


## TECHNICAL DATA SHEET

PRODUCT	<b>PU-GBD15/66-L**/options</b>	
SERIES	<b>2-Stage Double Acting</b> Air operated, high flow gas booster compressors offer a flexible and efficient source for delivering high pressure gases.	

### FEATURES

- Infinitely variable output pressure and flow
- Will hold static pressure without generating heat or consuming power
- Standard models are suitable for various gases
- Well proven and trouble-free operation
- Designed for ease of maintenance
- Low cost servicing
- Robust construction

### PERFORMANCE DATA

Max Rated Output Pressure	9,000psi (620bar)
Displacement Per Cycle	17.59 in <sup>3</sup> (288cc)
Max Flow	6.38 scfm (180 NI/min)
Max Air Supply Pressure	100psi (7bar)
Ratio	60 : 1
Air Consumption	120 scfm (3,400 NI/min)
Supply Pressure to Achieve Max Output Pressure	545psi (37bar)
Actual Output Pressure (Stall Condition)	66 x (Air drive pressure) + 4.4 x (Supply pressure)

### SEAL MATERIAL

Main Seals	MoS2
Check Valve Seals	Viton

### CONSTRUCTION

Air Motor	Anodised Aluminium / Nitrile (Buna-N) Seals
Gas Cylinder	17-4PH
Piston	17-4PH + Chrome Finish
Check Valves	Stainless Steel
Pilot Air Valves	Brass / Stainless Steel Internals / Nitrile (Buna-N) Seals / Stainless Steel Silencer
L1** (standard)	Copper Air Inlet & Plated Steel Silencer
L2** (optional)	Stainless Steel Air Inlet & Silencer

### CONNECTIONS

Gas Inlet	3/8" NPT(F)
Gas Outlet	1/4" HP(F)
Air Inlet	3/4" NPT(F)
Pilot Air Supply	1/8" BSPP(F)
Net Weight	50kg (110lb)

### COMMON OPTIONS (BUT NOT LIMITED TO)

/ A	ATEX (94/9/EC) II 2GD c T5
/ F	Panel mount digital stroke counter (non ATEX)
/ G	Panel mount pneumatic stroke counter

**GENERAL LAYOUT DRAWING**

Model: **PU-GBD15/66**

